
SF680 / SF680-S SF680P / SF680P-S



FEATURES

- Fits screens with mounting hole patterns up to 43.75" W and 29.31" H (1111 x 745mm)
- Low-profile design holds screen only 1.83" (47mm) from the wall for a clean application
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Horizontal screen adjustment up to 12" (304mm)
- Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- Includes Peerless' Sorted-For-You™ fastener pack with all necessary mounting and screen attachment hardware
- **UL** listed

Smart Mount®


Universal Flat Wall Mount

for 61" to 102" Flat Panel Screens

The sturdy SF680 wall plate holds screens weighing up to 350lb while featuring junction box access ports and horizontal screen adjustment up to 12" for ideal screen positioning. Its easy-glide brackets enable quick screen-to-mount attachment with its simple hook-on design. Delivering an ultra-slim profile, this mount is the ultimate in low-profile solutions for 61" to 102" flat panel screens.





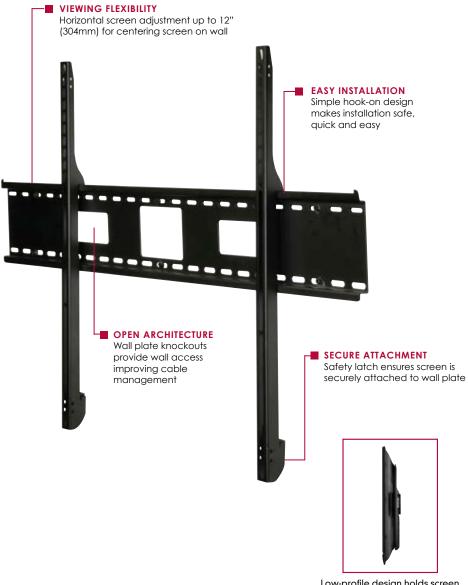













WARRANTY: Limited 5-year Model Numbers

SF680(-S) Universal Flat Wall Mount for 61" to 102" Flat Panel Screens - security models SF678P(-S) Universal Flat Wall Mount for 61" to 102" Flat Panel Screens - standard models

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SF680(P)(-S)	45.75" x 30.25" x 1.83" (1162 x 768 x 47mm)	14.3lb (5.48kg)	350lb (158kg)	Scratch resistant fused epoxy	SF680(P): Black SF680(P)-S: Silver


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SF680(P)(-S)	46.8" x 8.6" x 3.9" (1189 x 218 x 99mm)	16.5lb (7.48kg)	SF680: 735029242239 SF680-S: 735029242246 SF680P: 735029242253 SF680P-S: 735029242260	Wall mount, universal brackets, mounting and screen attachement hardware	1

Accessories

ACC615: 6-pack Metal Stud Fastener Kit ACC309: Video Conference Shelf

All dimensions = inch (mm)

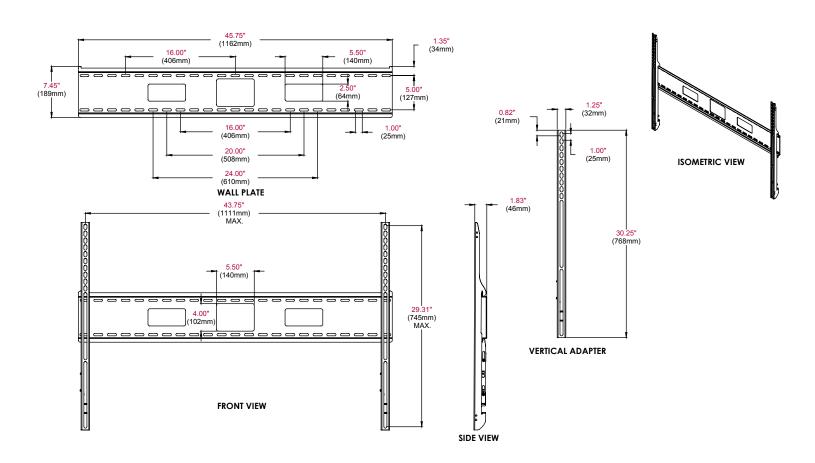

ARCHITECTS SPECIFICATIONS

The Smartmount® Universal Flat Wall Mount shall be a Peerless model SF680 and shall be located where indicated on the plans. It shall be constructed of heavy gauge cold rolled steel and finished with scratch resistant Black or Sliver Fused Epoxy.

Assembly and installation shall be done according to instructions provided by the manufacturer.

peerless